




Basic Quality Statistical Summary Report

Plant 1050-Independent North Mine (FDOT Pit #11-490)
Product 1009-Concrete Sand
Specification Concrete Sand
Period 12/09/2024 - 12/16/2024

Sieve/Test	Tests	Average	St Dev	Target	Specification
#4 (4.75mm)	10	100.0	0.00		95-100
#8 (2.36mm)	10	99.7	0.12		85-100
#16 (1.18mm)	10	92.9	0.41	67-98	65-99
#30 (.6mm)	10	64.5	3.03	27-79	25-80
#50 (.3mm)	10	24.2	3.36	7-38	5-40
#100 (.15mm)	10	1.2	0.45	0-6	0-7
#200 (75µm)	10	0.1	0.07		0-4
Pan	10	0.0	0.00		
FM	10	2.17	0.073	1.87-2.18\2	1.85-2.2
Total Moisture	10	3.8	0.65		
D10 (ES)	10	0.1967	0.00969		
D50	10	0.47	0.024		
D60	10	0.56	0.030		
Cc	10	1.01	0.015		
Cu	10	2.83	0.024		

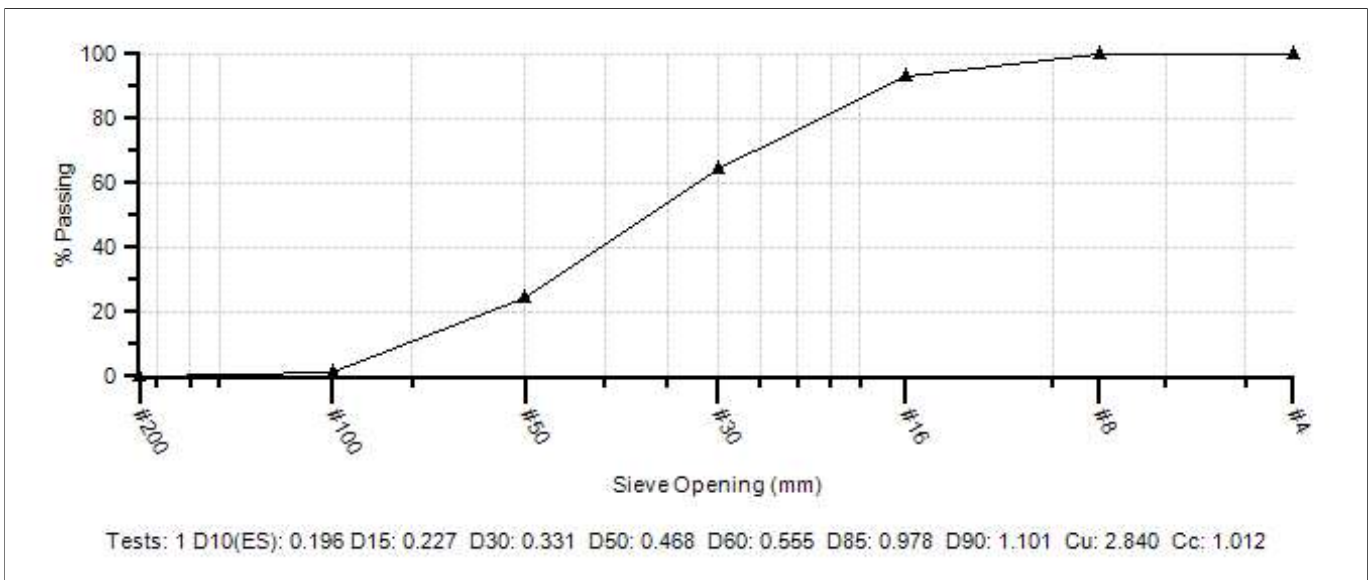

Query

Query Selections
Date Created 12/16/2024
Date Range 12/09/2024 - 12/16/2024
Plant Independent North Mine (FDOT Pit #11-490)
Sample Type Shipping