




Basic Quality Statistical Summary Report

Plant 1050-Independent North Mine (FDOT Pit #11-490)
Product 1009-Concrete Sand
Specification Concrete Sand
Period 12/23/2024 - 01/03/2025

Sieve/Test	Tests	Average	St Dev	Target	Specification
#4 (4.75mm)	8	100.0	0.00		95-100
#8 (2.36mm)	8	99.8	0.14		85-100
#16 (1.18mm)	8	93.1	0.98	67-98	65-99
#30 (.6mm)	8	60.7	2.56	27-79	25-80
#50 (.3mm)	8	20.5	2.51	7-38	5-40
#100 (.15mm)	8	0.7	0.19	0-6	0-7
#200 (75µm)	8	0.0	0.04		0-4
Pan	8	0.0	0.00		
FM	8	2.25	0.058	1.87-2.18\2	1.85-2.2
Total Moisture	8	3.5	0.76		
D10 (ES)	8	0.2088	0.00975		
D50	8	0.50	0.023		
D60	8	0.59	0.026		
Cc	8	1.01	0.011		
Cu	8	2.84	0.049		

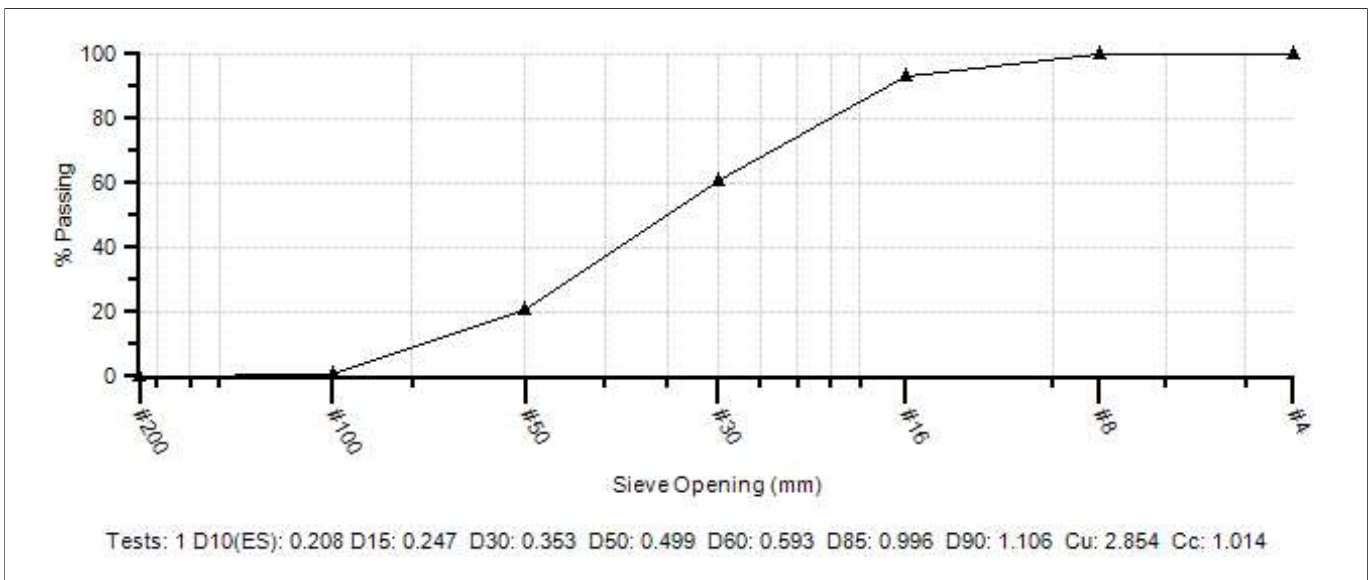

Query

Query Selections
Date Created 01/03/2025
Date Range 12/23/2024 - 01/03/2025
Plant Independent North Mine (FDOT Pit #11-490)
Sample Type Shipping