




Basic Quality Statistical Summary Report

Plant 1070-Independent South Mine (FDOT Pit#11-298)
Product 1009-Concrete Sand
Specification Concrete Sand
Period 02/19/2025 - 03/19/2025

Sieve/Test	Tests	Average	St Dev	Target	Specification
#4 (4.75mm)	12	100.0	0.09		95-100
#8 (2.36mm)	12	98.4	0.58		85-100
#16 (1.18mm)	12	91.1	2.63	67-98	65-99
#30 (.6mm)	12	67.6	8.63	27-79	25-80
#50 (.3mm)	12	39.2	14.60	7-38	5-40
#100 (.15mm)	12	6.5	3.87	0-6	0-7
#200 (75µm)	12	0.1	0.07		0-4
Pan	12	0.0	0.00		
FM	12	1.972	0.2885	1.87-2.18\2	1.85-2.2
Absorption (Fine)	1	0.24			
Total Moisture	12	4.223	1.8922		
D10 (ES)	12	0.17	0.029		
D50	12	0.39	0.106		
D60	12	0.49	0.124		
Cc	12	0.85	0.116		
Cu	12	2.89	0.350		
SPGR Fine (Dry, Gsb)	1	2.628			
SPGR Fine (SSD)	1	2.634			
SPGR Fine (Apparent, Gsa)	1	2.645			

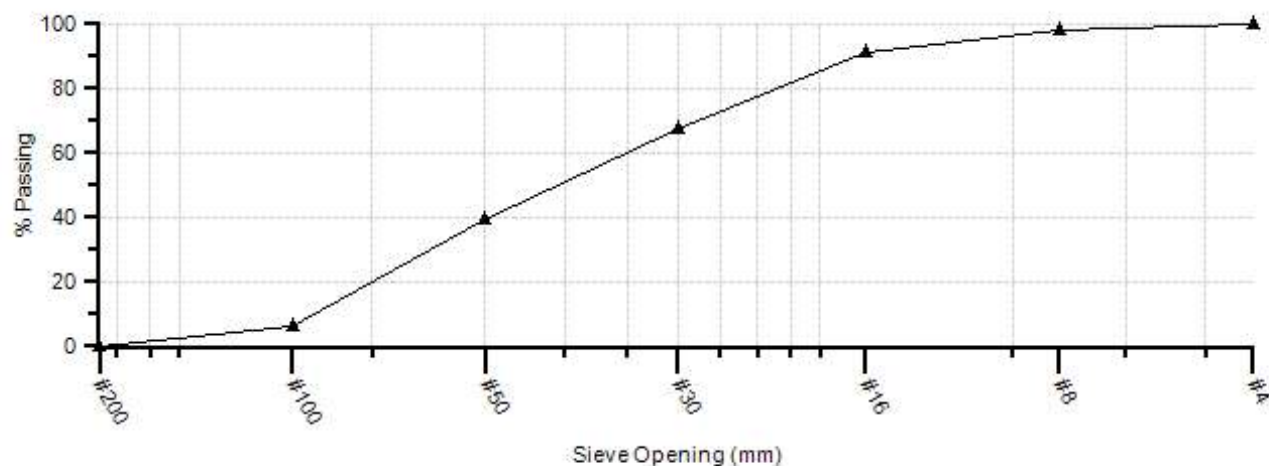

Query

Query Selections

Date Created 03/19/2025

Date Range 02/19/2025 - 03/19/2025

Plant Independent South Mine (FDOT Pit#11-298)

Sample Type Shipping